

无感无刷电机通用驱动器 Universal ESC for Sensorless BLDC Motor


应用领域：风机、电动工具、泵类等领域。

Applications: blowers, electrical tools, pumps, etc.

主要技术指标 | Characteristics

				S17-112503	S17-075020	
1	持续电流	Contant current	A	3	20	
2	峰值电流	Peak current(10s)	A	4.5	26	
3	输入电压范围	Input voltage range	V	11~25	7~50	
4	尺寸	Size	mm	99*72*25	99*72*25	
5	速度控制信号	Speed control signal		Analog voltage/PWM	Analog voltage/PWM	
6	过载保护	Overload protection		Yes	Yes	
7	堵转保护	Blockage protection		Yes	Yes	
8	过热保护	Thermal overload protection		Yes	Yes	
9	反接保护	Inverse-polarity protection		Yes	Yes	
10	正反转控制	Sense of direction		Optional	Optional	
11	使能控制	Enable		Optional	Optional	
12	速度信号输出	Speed feedback output(6 pulses*pole pairs)		Optional	Optional	
13	工作环境温度	Operating temperature	℃	-20~+60	-20~+60	
14	换向方式	Sensorless or sensed		Sensorless	Sensorless	

外观图 | Outline Drawing

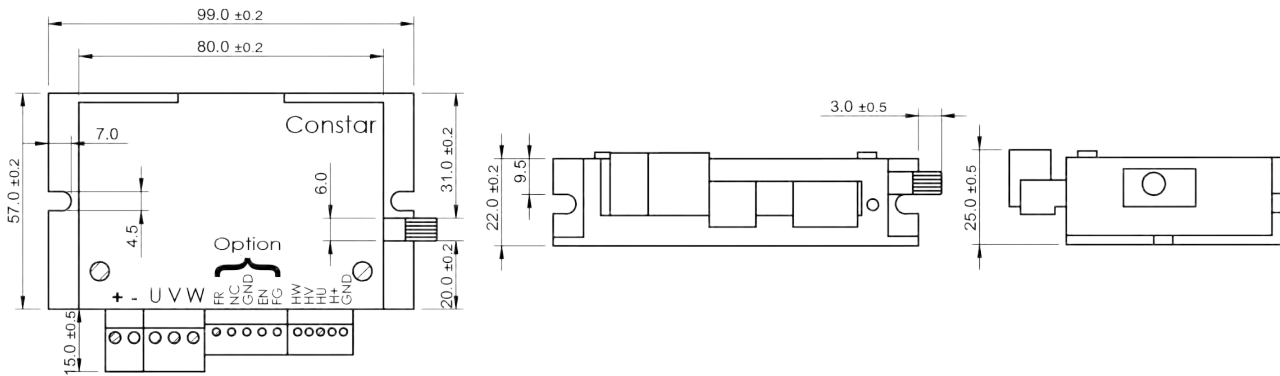

M 1:2

型号 / Model S17-112503/S17-075020