

BO2316N2B | 外转子无传感器 Outer Rotor, Sensorless

应用领域：无人机、航模等驱动领域。

Applications: UAV, aeromodelling, etc.


主要技术指标 | Characteristics

			01-170-6.0	02-170-9.0	03-170-12.0
1 电压	Voltage	V	6.0	9.0	12.0
2 端电阻	Terminal resistance	Ω	0.13	0.28	0.45
3 空载转速	No-load speed	rpm	17000	17000	17000
4 空载电流	No-load current	A	0.34	0.24	0.19
5 堵转转矩	Stall torque	mNm	158	160	177
6 堵转电流	Stall current	A	47.2	32.1	26.7
7 额定转矩	Nominal torque	mNm	30.4	30.0	30.3
8 额定转速	Nominal speed	rpm	7310	9920	10560
9 额定电流	Nominal current	A	8.1	6.3	4.9
10 最大输出功率	Max. output power	W	70	71	79
11 最大效率	Max. efficiency	%	83.6	83.5	83.6
12 反电势常数	Back-EMF constant	mV/rpm	0.4	0.5	0.7
13 转矩常数	Torque constant	mNm/A	3.4	5.0	6.7
14 KV 值	KV Value	rpm/V	2810	1887	1420
15 转速 / 转矩斜率	Speed/torque gradient	rpm/mNm	106.6	105.9	96.4
16 转子惯量	Rotor inertia	gcm ²	6.3	6.3	6.3
17 重量	Weight	g	15	15	15
18 热阻 (机壳 - 环境)	Thermal resistance housing-ambient	K/W		3	
19 热阻 (线圈 - 机壳)	Thermal resistance winding-housing	K/W		2.5	
20 热时间常数 (电机)	Thermal time constant motor	s		160	
21 热时间常数 (线圈)	Thermal time constant winding	s		26	
22 工作温度范围	Operating temperature range	°C		-40~+120	
23 绕组耐温等级	Thermal class of winding	°C		180	
24 轴向间隙	Axial play	mm		0.014	
25 径向间隙	Radial play	mm		0.008	
26 动态轴向载荷	Axial load dynamic	N		5	
27 静态轴向载荷	Axial load static	N		80	
28 径向载荷 (距安装面 3mm)	Radial load at 3 mm from mounting face	N		29	
29 极对数	No. of pole pairs			6	
30 轴承	Bearings			2 枚滚动轴承/2 ball bearings	
31 换向结构	Commutation			无传感器/Sensorless	
32 防护等级	Protection class			IP 20	

★可选参数 Options: 导线长度 Lead wires length 轴长 Shaft length 性能 Special coils 齿轮箱 Gearheads 轴承类型 Bearing type

编码器 Encoder 驱动器 Driver

外观图 | Outline Drawing

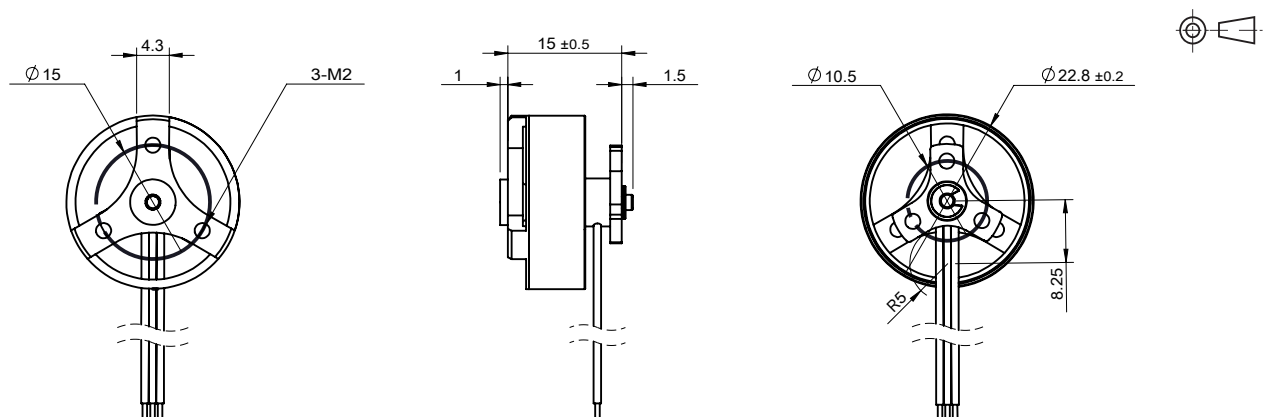

M 1:1