

C2838R415 | 碳刷 Graphite Brush


应用领域：汽车产品、吸奶器、电动工具等。

Applications: automotive products, breast pumps, electric tools, etc.

主要技术指标 | Characteristics

				415-0016		
1	电压	Voltage	V	13.0		
2	空载转速	No-load speed	rpm	6400		
3	空载电流	No-load current	mA	90		
4	堵转转矩	Stall torque	mNm	39.2		
5	堵转电流	Stall current	mA	2086		
6	负载转矩	Load torque	mNm	5.69		
7	负载转速	Load speed	rpm	5470		
8	负载电流	Load current	mA	380		
9	最大输出功率	Max. output power	W	6.57		
10	最大效率	Max. efficiency	%	66.5		
11	转矩常数	Torque constant	mNm/A	19.64		
12	转速 / 转矩斜率	Speed/torque gradient	rpm/mNm	163		
13	压敏电阻	Varistor	Yes/No	No		
14	重量	Weight	g	70		
15	工作温度范围	Operating temperature range	°C	0~+60		

特性曲线 | Characteristics Curve

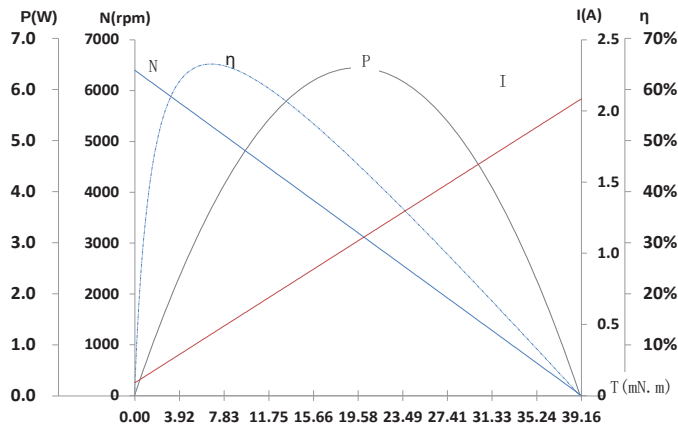

型号 / Model C2838R415-0016

可选参数 | Options

导线长度 Lead wires length
轴长 Shaft length
性能 Special coils
齿轮箱 Gearheads

外观图 | Outline Drawing

